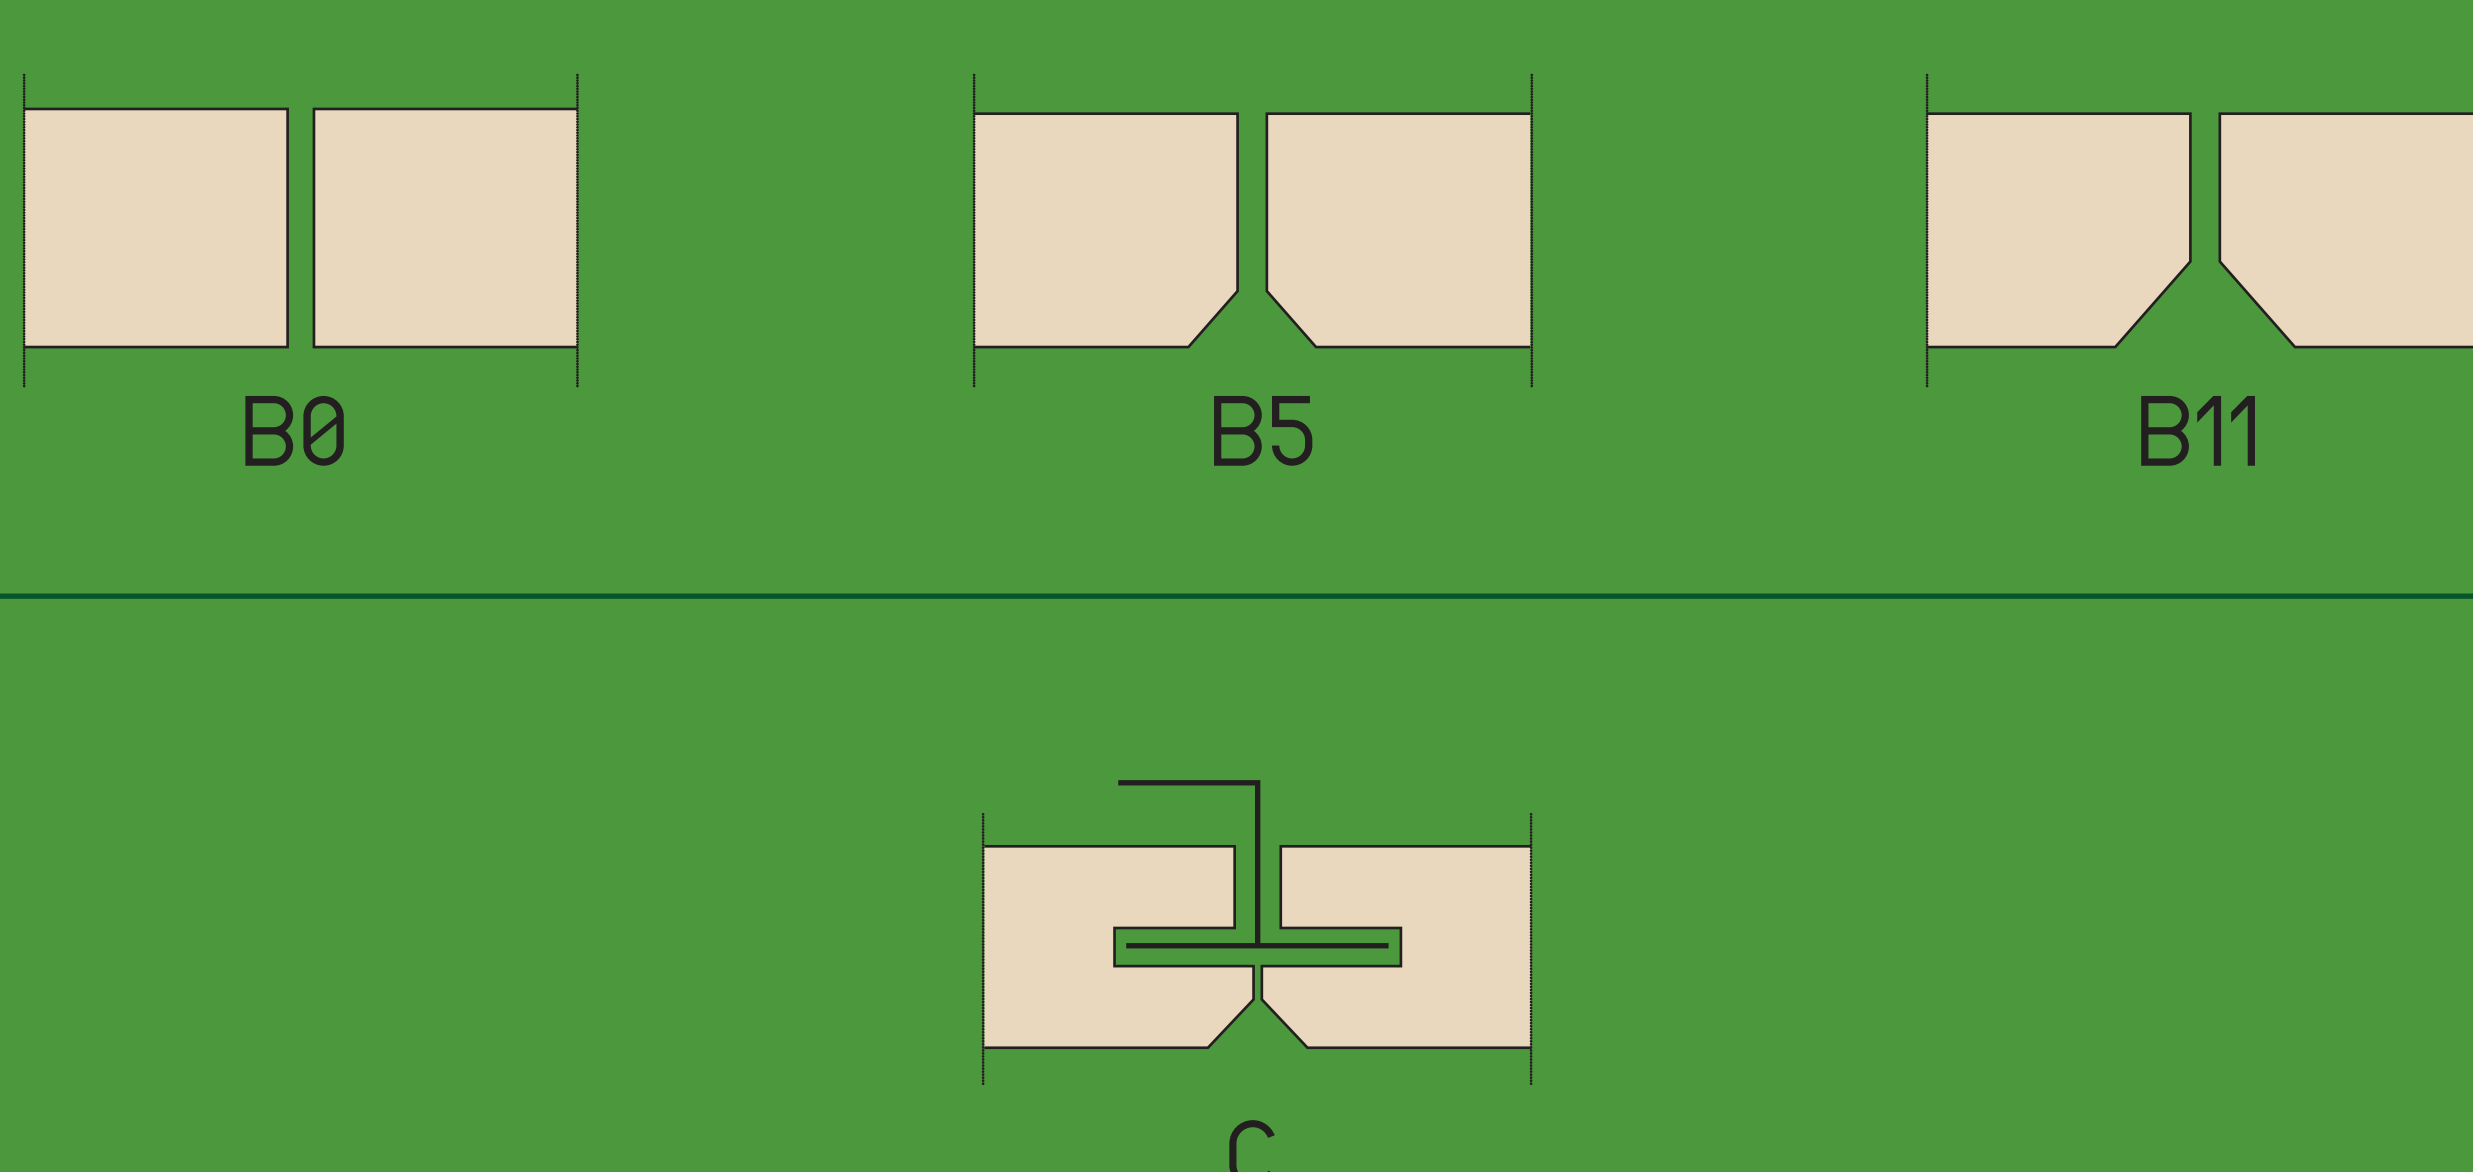


Wood Wool Cement Board (WWCB)

- ✓ **Manufactured by combining spruce fiber with Portland cement**
- ✓ **Panels require no special maintenance**
- ✓ **No formaldehyde-based binders used**
- ✓ **Colours:**
 White – similar to RAL 9010
 Natural – similar to RAL 1015 or unpainted
 Light grey – similar to RAL 7035
 Dark grey – similar to RAL 7004 or 7005
 Black – similar to RAL 9011
 Other RAL or NCS colours upon request
- ✓ **Sound absorption coefficient** up to α_w 0.95
- ✓ **Reaction to fire:** B-s1, d0 or A2-s1, d0
- ✓ **Moisture resistance:** up to RH 90%
- ✓ **Thermal conductivity λ :**
approx. 0.09-0.10 W/mK%
- ✓ **Standards:**
EN 13168:2012+A1:2015, EN 13964, EN 13501-1
- ✓ **Certificates:** FSC®, PEFC, CE marking, DoP, EPD

Main Dimensions and Weight:

Thickness:	15 mm	25 mm	35 mm
	Width: 600 mm		
Length:	600 / 1200 mm*	600 / 1200 / 2400 mm*	600 / 1200 mm*
Fiber width:	1.0 / 1.5 mm	1.0 / 1.5 / 2.0 mm	
Weight:	6.2 kg/m ²	11 kg/m ²	15 kg/m ²
Edge details:			
*Custom sizes as per request			